

# CS-N Series

N-type i-TOPCon bifacial dual glass  
Monocrystalline module

PRODUCT: **CS-NSP**

POWER RANGE: **585-610W**

## 610W

MAXIMUM POWER OUTPUT

## 0~+5W

POSITIVE POWER TOLERANCE

## 22.6%

MAXIMUM EFFICIENCY



### High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- More energy harvest with cutting-edge N-type i-TOPCon technology
- Designed for compatibility with existing mainstream system components
- Higher container space utilization effectively reduces the freight cost



### High power up to 610 W

- Up to 22.6% module efficiency with high density interconnect technology
- SMBB (Super multi-busbar) technology for better light trapping effect, lower series resistance and improved current collection



### High reliability



- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



### High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- Lower degradation : 1% first year , 0.4% annually thereafter
- Lower temperature coefficient (-0.29%/°C)
- Up to 30% additional power gain from back side depending on albedo

### CMB Solar's Vertex Bifacial Dual Glass Performance Warranty

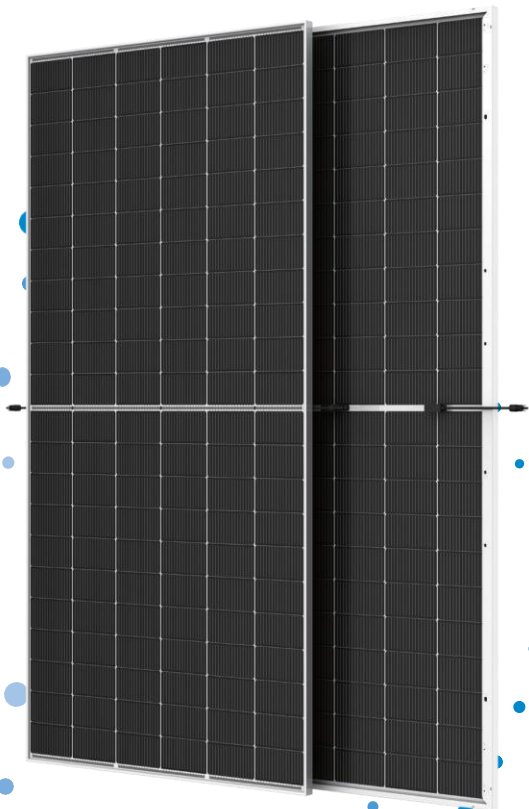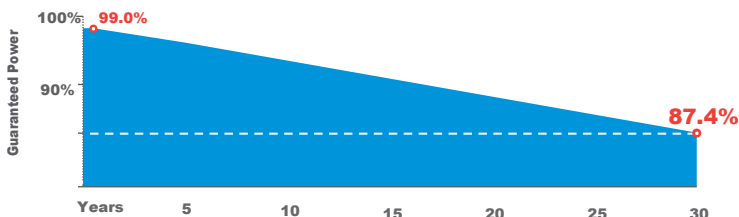

#### Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System




**CMB Solar**  
 北极光太阳能


Factory: No.161, Huaxing Road, Langkou Community, Dalang Street, Longhua District, Shenzhen, China  
 E-mail: sales@cmb solar.com  
 Website: www.cmb solar.com

# CS-N series N-type i-TOPCon bifacial dual glass Monocrystalline module


## DIMENSIONS OF PV MODULE(mm)

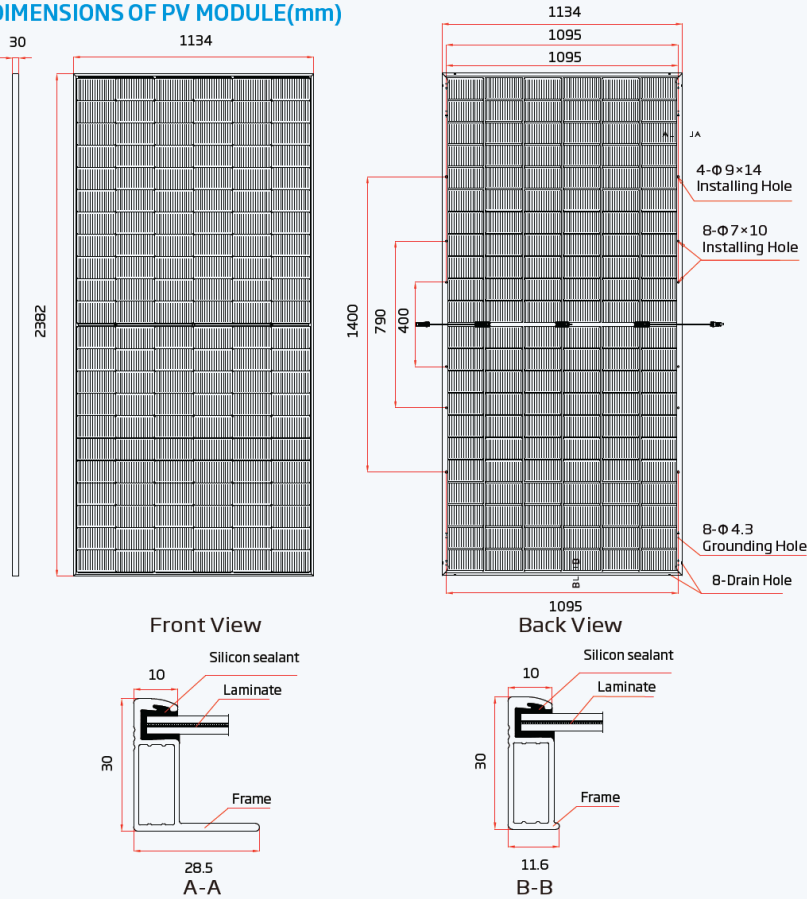

## I-V CURVES OF PV MODULE (600 W)

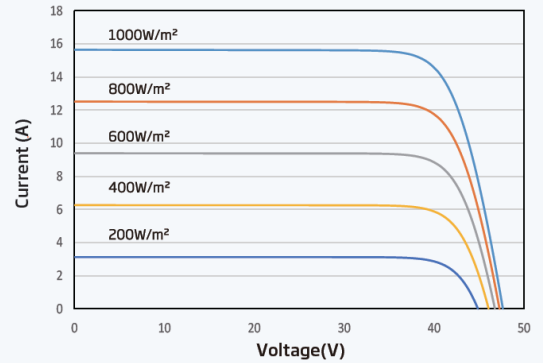

## P-V CURVES OF PV MODULE (600 W)

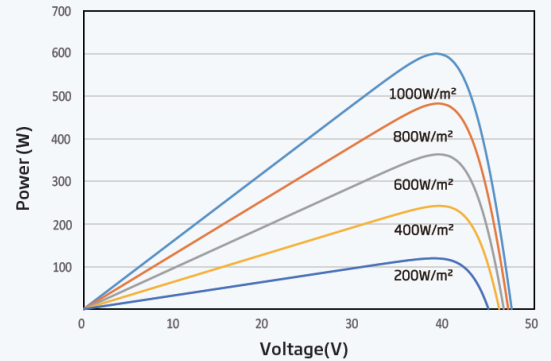

## MECHANICAL DATA

Solar Cells	N-type Monocrystalline
No. of cells	132 cells
Module Dimensions	2382×1134×30 mm (93.78×44.65×1.18 inches)
Weight	33.7kg (74.3lb)
Front Glass	2.0mm(0.08inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	2.0mm(0.08inches), Heat Strengthened Glass (White Grid Glass)

Frame	30mm(1.18 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm2 (0.006 inches2) Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	MC4 EVO2 / TS4 PLUS / TS4*

\*Please refer to regional datasheet for specified connector.

## ELECTRICAL DATA (STC & NOCT)

Testing Condition	STC		NOCT		STC		NOCT		STC		NOCT		STC		NOCT	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Peak Power Watts- $P_{MAX}$ (Wp)*	585	447	590	450	595	454	600	459	605	462	610	466				
Power Tolerance- $P_{MAX}$ (W)	0 ~ +5															
Maximum Power Voltage- $V_{MPP}$ (V)	39.5	37.2	39.7	37.4	40.0	37.6	40.3	37.9	40.5	38.1	40.8	38.3				
Maximum Power Current- $I_{MPP}$ (A)	14.82	12.02	14.86	12.05	14.89	12.07	14.91	12.11	14.94	12.13	14.96	12.16				
Open Circuit Voltage- $V_{OC}$ (V)	47.5	45.1	47.8	45.4	48.1	45.7	48.4	46.0	48.7	46.2	49.0	46.5				
Short Circuit Current- $I_{SC}$ (A)	15.68	12.64	15.72	12.67	15.76	12.69	15.80	12.73	15.83	12.75	15.86	12.78				
Module Efficiency $\eta_m$ (%)	21.7		21.8		22.0		22.2		22.4		22.6					

STC: Irradiance 1000W/m2, Cell Temperature 25°C, Air Mass AM1.5. NOCT: Irradiance at 800W/m2, Ambient Temperature 20°C, Wind Speed 1m/s. \*Measuring tolerance: ±3%.

## Electrical characteristics with different power bin (reference to 5% & 10% backside power gain)

Backside Power Gain	5%		10%		5%		10%		5%		10%		5%		10%	
	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
Total Equivalent power- $P_{MAX}$ (Wp)	614	644	620	649	625	655	630	660	635	666	641	671				
Maximum Power Voltage- $V_{MPP}$ (V)	39.5	39.5	39.7	39.7	40.0	40.0	40.3	40.3	40.5	40.5	40.8	40.8				
Maximum Power Current- $I_{MPP}$ (A)	15.56	16.30	15.60	16.35	15.63	16.38	15.66	16.40	15.69	16.43	15.71	16.46				
Open Circuit Voltage- $V_{OC}$ (V)	47.5	47.5	47.8	47.8	48.1	48.1	48.4	48.4	48.7	48.7	49.0	49.0				
Short Circuit Current- $I_{SC}$ (A)	16.46	17.25	16.51	17.29	16.55	17.34	16.59	17.38	16.62	17.41	16.65	17.45				

Power Bifaciality: 80±5%.

## TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of $P_{MAX}$	-0.29%/°C
Temperature Coefficient of $V_{OC}$	-0.24%/°C
Temperature Coefficient of $I_{SC}$	0.04%/°C

## MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	35A

## WARRANTY

12 year Product Workmanship Warranty  
 30 year Power Warranty  
 1% first year degradation  
 0.40% Annual Power Attenuation  
 (Please refer to product warranty for details)

## PACKAGING CONFIGURATION

Modules per box: 36 pieces  
 Modules per 40' container: 720 pieces